



Dual Plus

Traffic Barrier



Tested Impact Energy
according to **PAS13**

102.700 Joule

At 22.5° Impact, 3.0 km/h (1,86 mph)
and 11.590 kg (25551 lbs) on
a C20/25 concrete floor and
max. force to bolt at 21 kN.

Description

The Dual Plus Traffic Barrier by d-flexx is an innovative solution that combines the features of the models, providing enhanced safety and flexibility for industrial environments. Designed to safeguard employees, machinery, and infrastructure from vehicle impacts, the Dual Plus barrier is ideal for areas with frequent vehicle traffic, such as warehouses, factories, and logistics centres. Engineered to absorb and deflect impact energy, the Dual Plus barrier minimizes damage while maintaining its structure, ensuring long-term durability and cost-effectiveness. Its modular design allows for easy installation and customization to suit various facility layouts.

Key Features:

- Combination of Dual and Pedestrian models for optimized performance
- High-impact resistance for protection against vehicle collisions
- Modular design for flexible installation
- Tested according to PAS13 for enhanced safety and performance
- The Dual Plus Traffic Barrier offers superior protection for your facility while adhering to essential safety regulations, making it an indispensable addition to any industrial or logistic operation.

Technical Information

Operational Temperature Range:	-40°C up to +50°C / -40°F up to +112°F
Ignition Temperature:	350-360°C / 662 - 680°F
Flash Point:	350-360°C / 662 - 680°F
Toxicity:	Nontoxic
Chemical Resistance:	High-ISO / TR 10358
UV Stability	Gray scale: 5/5
Changes to material after 5 years:	Blue Wool scale: 8/8 Tensile strength: No changes
Static Rating (surface resistivity):	1015-1016 Ω
Standard Warranty:	5 Years
Fixations:	Concrete screw, Zinc coated, Size Ø12x80 mm
Deflection zone:	250mm / 9,84in



Scan or click to review



*Maintenance Guide
Assembly Guide
Videos
Tender Text
Warranty*



Specifications

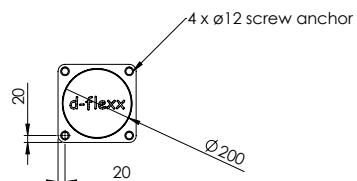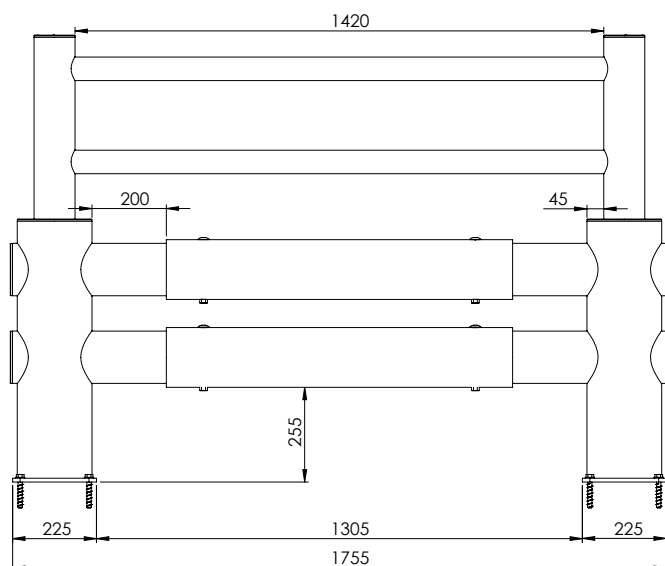


Measurements mm vs in

	mm	in
Diameter	200	7,87
Height	1200	47,24
Space	255	10,04
Width 1	45	1,77
Width 2	200	7,87
Width 3	1305	51,38
Width 4	1755	69,09
Footplate	225	8,86
Pos. drill holes	20	0,79



Max. force to bolt 21 kN



Impact Test Dual Plus

Mid Rail Max. Energy (Joules)	90°	67,5°	45°	22,5°
	15.000	17.600	30.000	102.700

End post max. energy (Joules) - 90°	4.000
-------------------------------------	-------

Mid post max. energy (Joules) - 90°	4.000
-------------------------------------	-------