

Slowstop® Type 3 Bollard - 168mm Dia.



Suggested Uses.



- Heavy duty applications where large trucks and/or heavy forklifts are present.
- Protect high value assets, building assets and racking protection
- Utility protection and fuel pump protection.

Benefits.

- Will stop up to 35t travelling 3.1km/h
- Flexible elastomer in the base eliminates floor damage - safe for installation in structural concrete
- Absorbs impact and flexes up to 20 degrees before returning to upright position
- Stopping Power Rating: 26,700 joules

Specifications.

Code	49-SSB168Y
Description	Slowstop® Type 3 Bollard
Diameter	168mm
Material	Galvanised Steel with Yellow Powdercoat
Wall thickness	7.1mm
Height	1000mm
Weight	77kg
Base Plate Width	410mm
Temperature Rating:	from -40° to +70° Celsius
Fixings	8 (supplied)

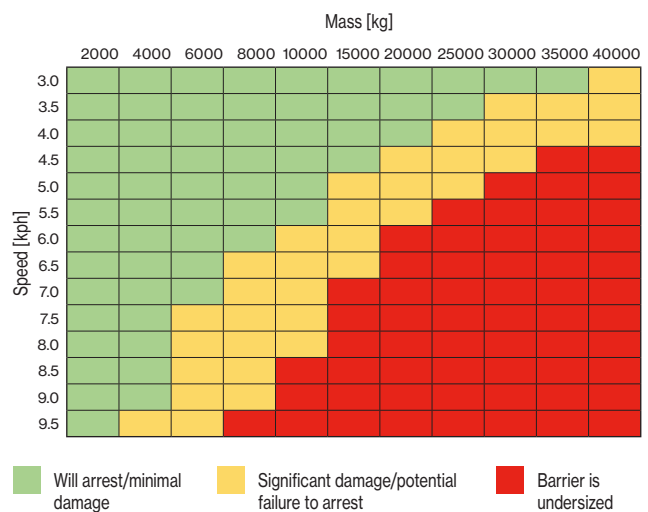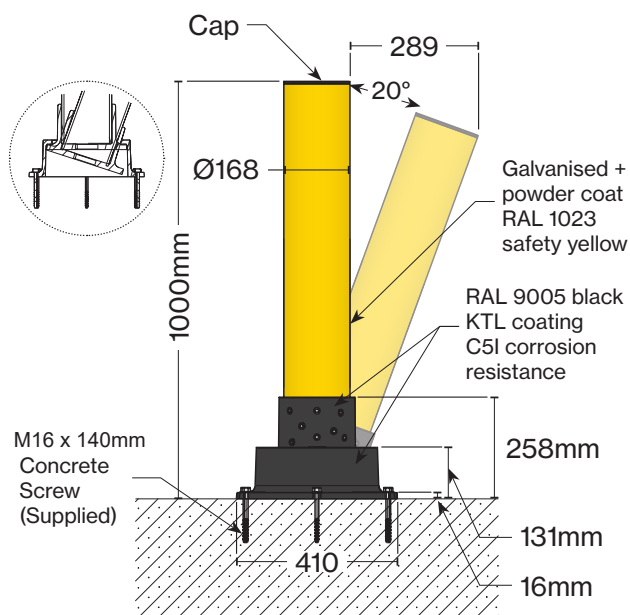


Scan here to view the webpage.




Slowstop® Type 3 Bollard - 168mm Dia.

Diagrams.

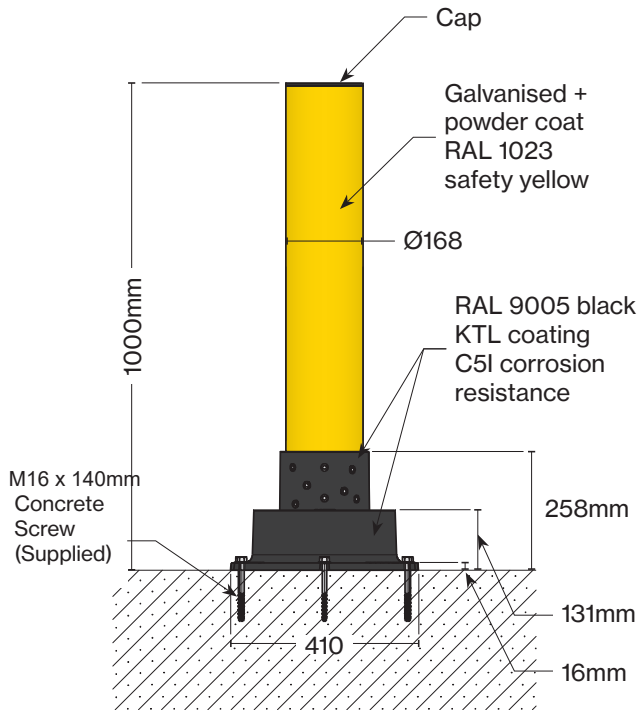

*Minimum foundation depends on local soil conditions, weather & eng. req'ts

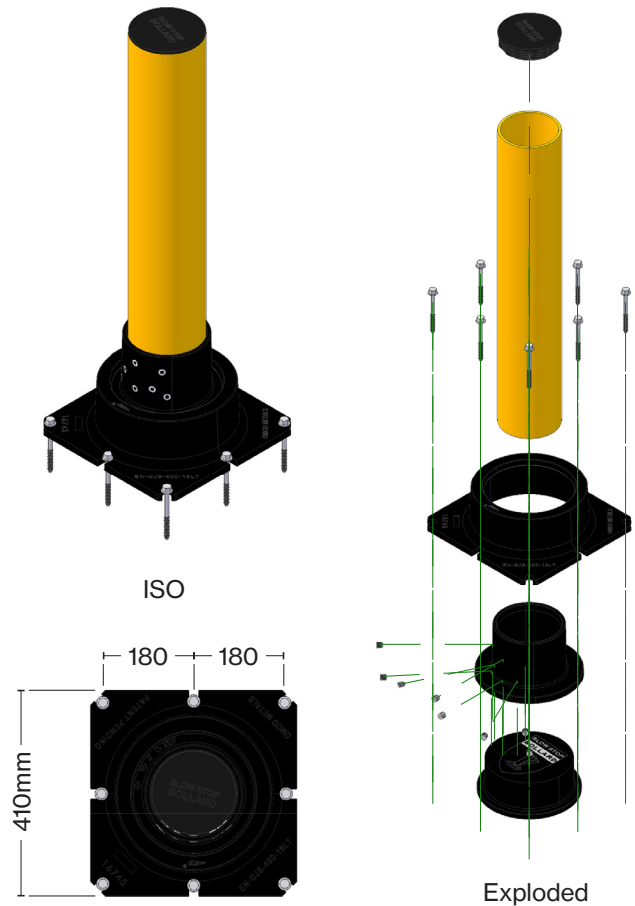

Footing for use in asphalt. Not required in concrete.

