

# DockSafe Lift-Up Gate

## Lift Up Pedestrian Dock Gate

### Function



Reversible  
Design



Quick + Easy  
To Install



Weather  
Resistant

### Features



No Welding  
Required



Bolt Down  
Design



Replaceable  
Parts

### Configurations

■ Height:  
1094mm

■ Length:  
Up to 2560mm between posts (Custom lengths available)



### Specifications

- Steel and aluminium construction
- Zinc plated with powder coated finish
- Fully welded bollard style posts
- 1094mm height
- Gas strut assisted closing
- Includes handle to assist lowering and raising
- 140mm Ø bollards either side
- Can be easily cut to length
- Easily replaceable gas strut
- Gas strut and arms remain inside bollard when raised


## Product Information

| Model      | Length | Type                       | Image                                                                               |
|------------|--------|----------------------------|-------------------------------------------------------------------------------------|
| 49-DSLUG-R | 2560mm | With Receiver Bollard Post |  |
| 49-DSLUG   | 2560mm | No Receiver Bollard Post   |  |

### Detailed Specifications

|               |                                                                      |
|---------------|----------------------------------------------------------------------|
| Application   | To create a visual barrier at the dock edge for pedestrians and MHE. |
| Impact        | DockSafe Lift-Up Gates are not recommended for vehicle impact.       |
| Post Material | Steel                                                                |
| Arm Material  | Aluminium                                                            |
| Pre-Treatment | Zinc plated (Steel components only)                                  |
| Finish        | Powder coated                                                        |
| Fasteners     | 4x M12 x 100mm screw bolt anchors per post                           |
| Closed Dims   | Overall: 2958L x 1094H (mm)                                          |
| Open Height   | 3675H (mm)                                                           |
| Open Width    | Max 2568mm between posts                                             |
| Bollard Size  | 140mm Ø                                                              |
|               |                                                                      |

### Open/Closed Views

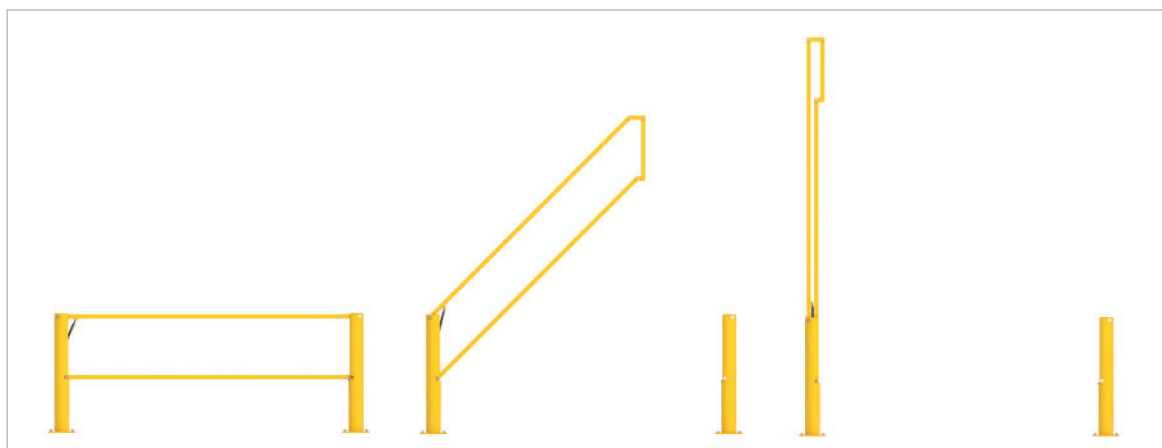

# Product Information

## Dimensions

