

Premium Wheel Stop – 1650mm



Suggested Uses.

- Prevent vehicles from travelling into other parking spaces or surrounding assets, vehicles or people.
- Make your carpark look tidy and professional

Benefits.

- Complies with appropriate standard AS2890.1:2004
- Hi-vis chevrons create good visibility and make the wheelstop less likely to be a trip hazard.
- One man lift for cost effective and easy installation
- Heavy duty recycled plastic – more durable than standard rubber wheel stops

Specifications.

Code	2910-017
Description	Premium Wheel Stop – 1650mm
Material	100% Recycled Plastic
Height	100mm
Width	160mm
Length	1650mm
Weight	13.5kg
Fixings	3


Installation.

49-CF12150: Concrete Surface

Drill 12mm dia x 150mm deep hole into concrete, clear out dust, insert bolt and tighten.

49-FR12: Asphalt Surface:

Position the wheel stop, drill 14mm dia pilot hole through the asphalt, then drive spike through.

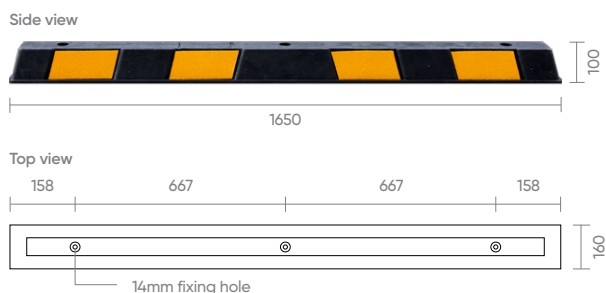

VIEW ONLINE

