

ForkSafe® 950-D

16.23 kJ



Certification


- Impact simulation tested – stops 7T at 7.8km/h
- Meets AS/NZS 1170.1 Section 3.8 – Type F 30kN and Type G 40kN
- Tested in compliance with PAS13 (certification available on request)

IMPACT SIMULATION

Barrier Details

Barrier Type	ForkSafe 950-D
Barrier Height	950mm
Bay Length	2400mm centres
Number of Rails Per Bay	1 set (1 set = 8 rails)
Number of Bays	3

Impact Table

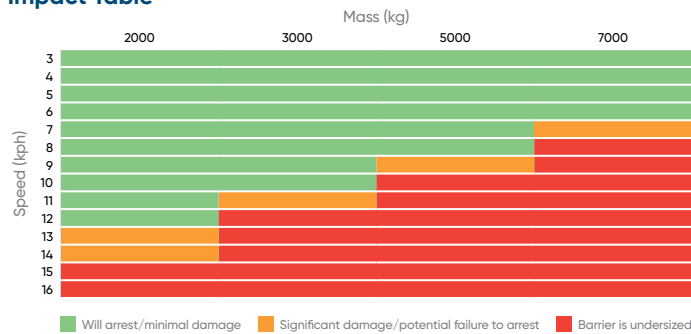

Forklift and Load Details

Mass of Forklift and Speed 90 Degrees	4 Tons @ 10.25km/h
Mass of Forklift and Speed 25 Degrees	32 Tons @ 4km/h
Impact Region	Centre of all rails, 1.5m wide area
Height from Ground	72mm
Concrete Strength	31 MPa minimum
Energy	16225 Joules

Methodology

Model	Plasticity-von mises
Study Type	Linear static structural
Angle of Impact	90 Degrees

Results

Deflection Expected	157mm
Deformation	Permanent

