

TECHNICAL SPECIFICATIONS

GuardSafe® Bollard Range

GuardSafe® 220mm Surface Mount Bollard

TRAFFIC CONTROL & ASSET PROTECTION



- Material: Galvanised steel – 4.5mm wall thickness
- Finish: Galvanised or galvanised with yellow powdercoat finish
- Caps: To match bollard finish
- Base Plate: 350 x 350 x 12mm
- Other Sizes Available: Ø115mm and Ø165mm


INSTALLATION GUIDE

Concrete Surface:

- Drill Ø12mm x 160mm deep hole into concrete, clear out dust, insert bolt and tighten.

Asphalt Surface:

- Bollards can not be mounted directly onto an asphalt surface, a concrete footing of 550(L) x 550(W) x 450(D)mm must be installed first, and then the bollard is mounted to the footing using the concrete screws provided.

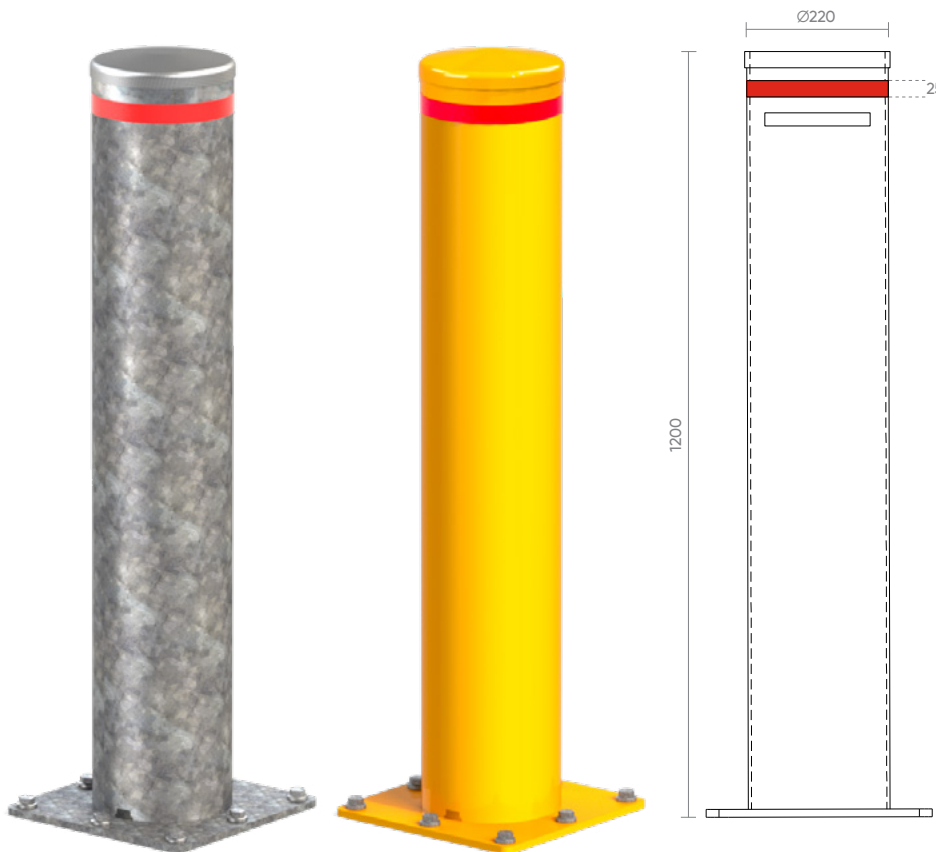

Options

Code	Description	Size (mm)	Weight	Finish
1611-121	GuardSafe Surface Mount Bollard	Ø220 x 1200(H)	50kg	Galvanised
1611-122	GuardSafe Surface Mount Bollard	Ø220 x 1200(H)	50kg	Galv/Yellow
Fixings				
1911-028	M12 x 150mm Concrete Screw, Galv (8 per)			

VIEW ONLINE

