

# ForkSafe® 950-A

## WALKWAY PROTECTION




11.75


kJ

**10**  
 YR  
 WARRANTY


- **Height:** 950mm
- **Number of Rails Per Bay:** 2 sets (1 set = 3 rails)
- **Rail Lengths:** 1200mm, 2400mm
- **Finish:** Galvanised with yellow powdercoat finish
- **Post Material:** Steel – 5mm and 8mm wall thickness
- **Rail Material:** Steel – 2mm wall thickness
- **Connector:** M12 x 30mm 8.8 high tensile bolt
- **Fixings:** M12 x 100mm concrete screw bolts (4 per post, supplied)
- **Post Size:** 90 x 90mm 'I' beam type section with Crumple Zone Technology
- **Base Plate:** 180 x 180mm square, 12mm thick, 4 x Ø16mm anchor holes
- **Cap:** Yellow HDPE clip-on cap

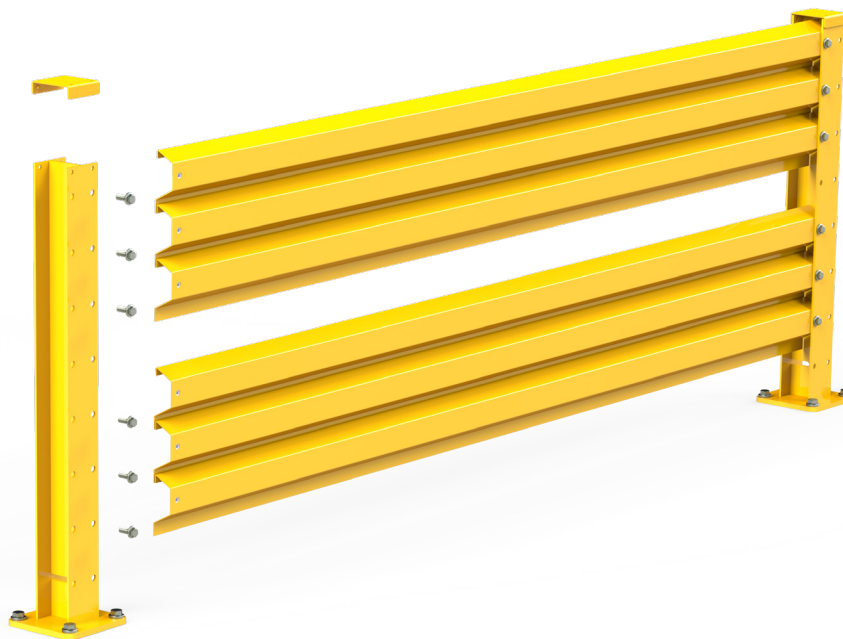


3313-001



3310-018

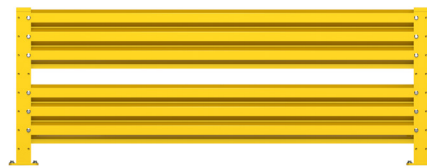

3310-001

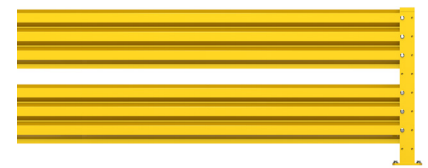

3310-002

### Options

Code	Description	Height (mm)	Rail Length (mm)	Finish
3310-018	950-A Starter Bay	950	1200	Galv/Yellow
3310-001	950-A Starter Bay	950	2400	Galv/Yellow
3310-002	950-A Add-On Bay	950	2400	Galv/Yellow
3313-001	ForkSafe 90° Corner (incl. 6 x Fixing 3313-036)			Galv/Yellow

### Components

Code	Description	Size (mm)	Finish
3211-034	ForkSafe Post	950(H)	Galv/Yellow
3312-011	ForkSafe Rail	2400(L)	Galv/Yellow
3212-019	ForkSafe Rail	1200(L)	Galv/Yellow
3313-037	ForkSafe Post Cap		Yellow, HDPE
Fixings			
3313-036	Flanged Purlin Bolt & Nut, M12 x 30mm, 8.8, Galv		
1911-016	M12 x 100mm Concrete Screw		

VIEW ONLINE



# ForkSafe® 950-A

## WALKWAY PROTECTION

